


## NOTES:

1. BOLLARD TO BE CONSTRUCTED OF POWDER COATED STEEL, STAINLESS STEEL OR ALUMINUM. WIRING ACCESS OPENING TO BE PROVIDED IN LEAST VISIBLE SIDE OF BOLLARD.
2. WELDED BASE PLATE MAY BE FLUSH WITH FRONT OR BACK OF BOLLARD AS APPROPRIATE. BASE PLATE TO INCORPORATE  $\frac{5}{8}$ "  $\varnothing$  DRILLED HOLES FOR ANCHORING TO CONCRETE WITH  $\frac{1}{2}$ "  $\varnothing$  X 4" EXPANSION ANCHORS.
4. ALL EXPOSED WIRING LOCATED OUTDOORS TO BE INSTALLED IN 3/4" RIGID CONDUIT OR "SEALTITE" .
5. OPTIONAL INSTALLATION: ACTIVATION COLUMN MAY BE INSTALLED ON MASONRY WALL INSTEAD OF BOLLARD, PROVIDED IT IS MOUNTED WITH NO EXPOSED RACEWAY AND LOCATED ALONG THE ACCESSIBLE ROUTE TO THE ENTRANCE.
6. ACTIVATION COLUMNS MOUNTED IN EXTERIOR BOLLARDS OR WALLS SHALL BE WEATHERTIGHT.

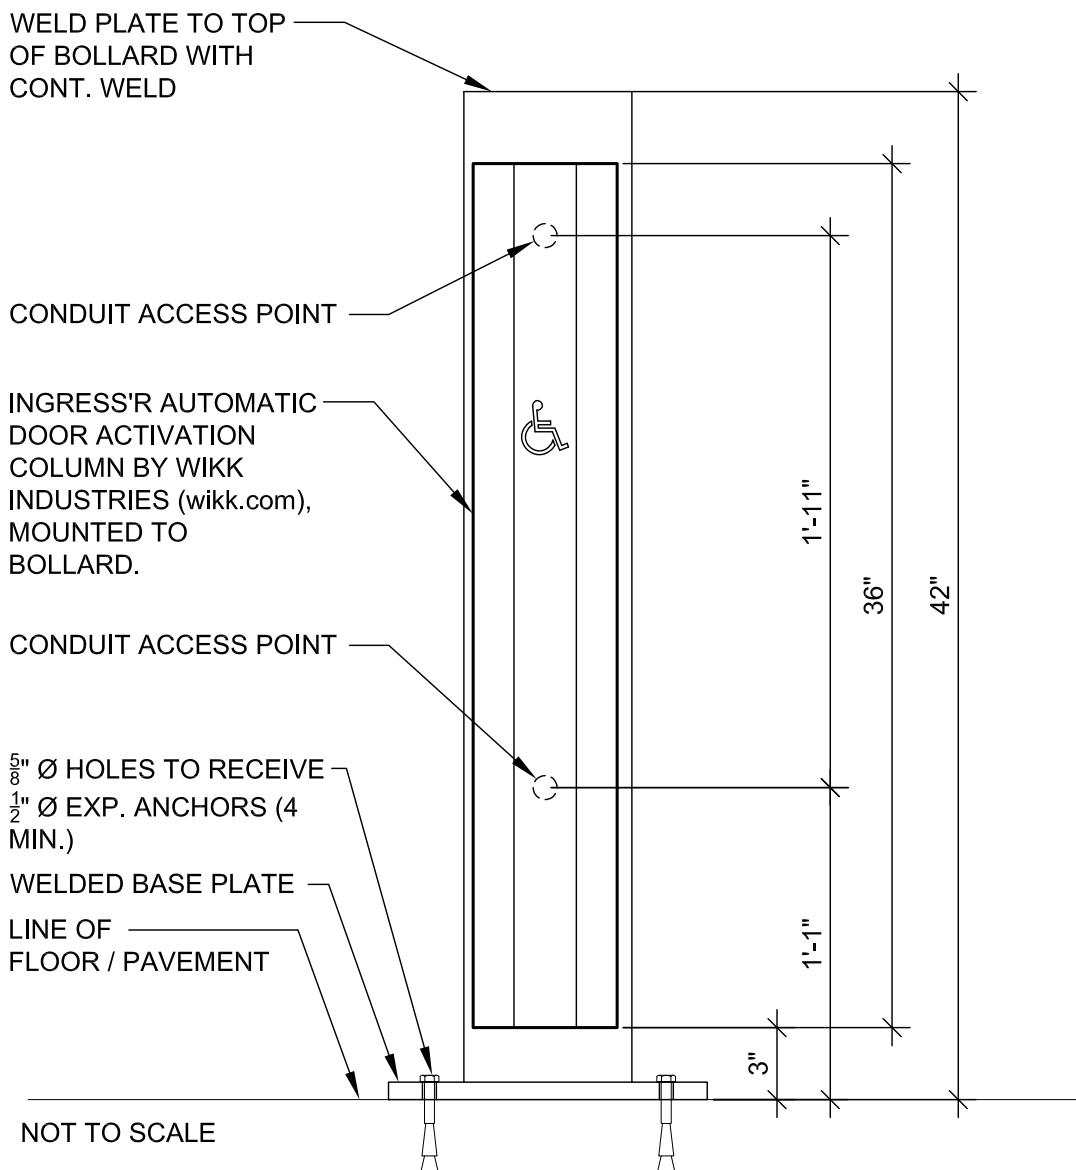

AUTOMATIC DOOR OPENER CONTROL STATION

Date: April 9, 2010

Dwg. No.: 08 42 29-1