O:\Projects\UIUC_In-House_Project_Templates\In-Progress_Templates\2)_Drawings_for_Standards\Standard_Details\In_Progress\2013 Std Dtl Revisions\Drawing 27 00 00 10, Tele

TELECOMMUNICATIONS TYPICAL 12'x6'x7' "J" MANHOLE - INTERIOR VIEW

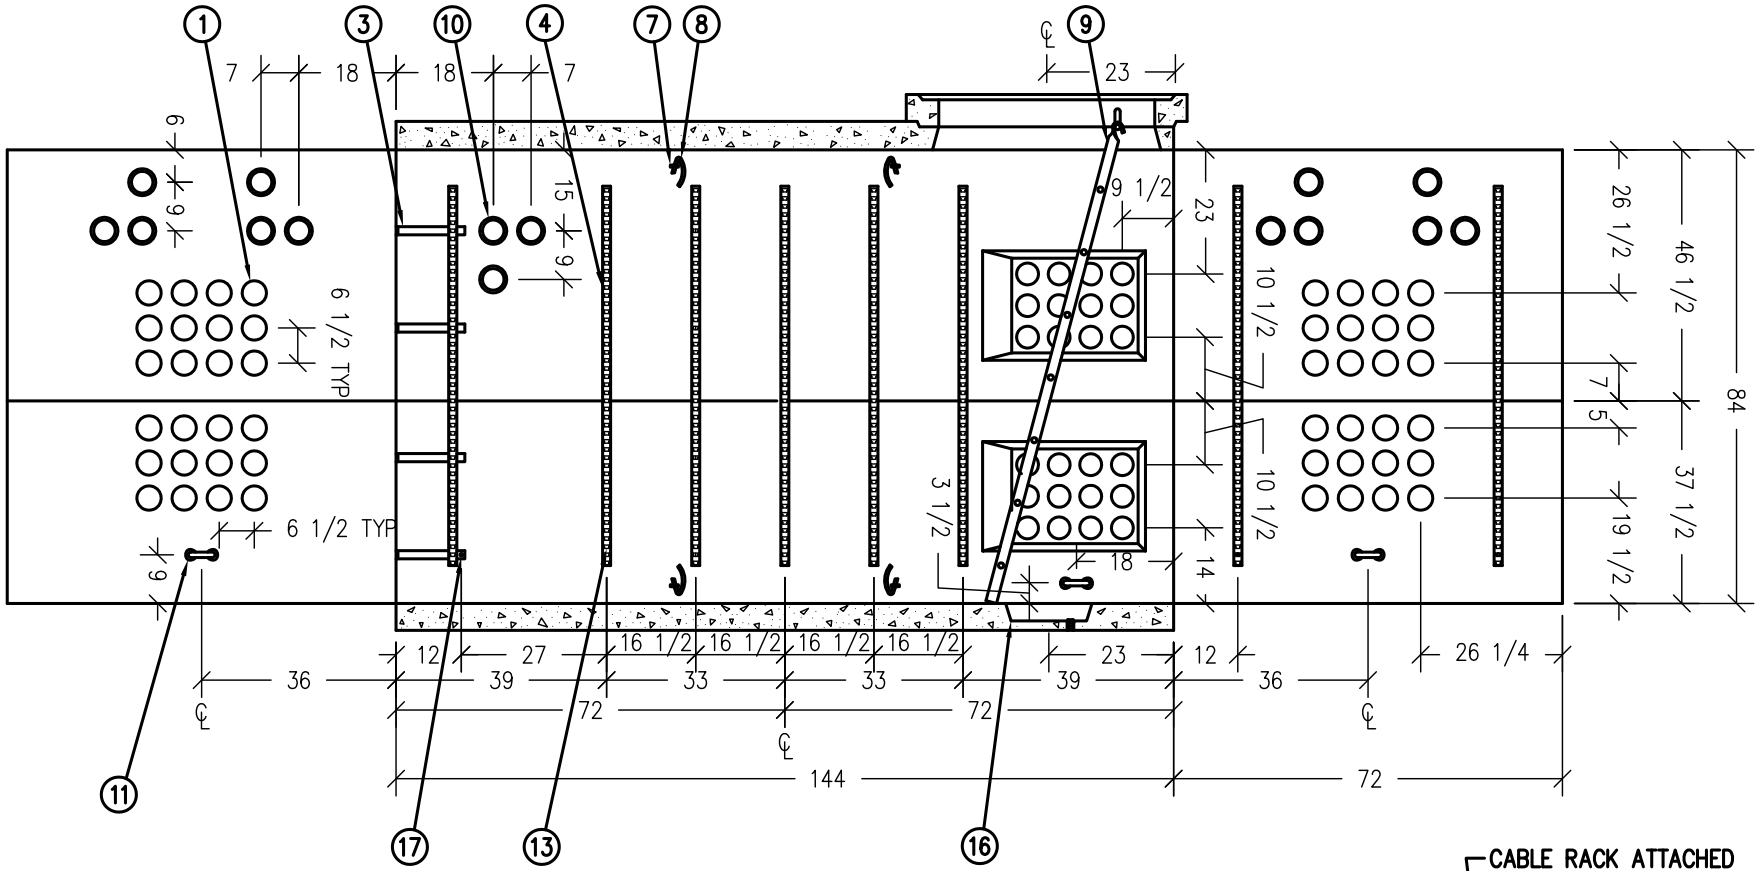

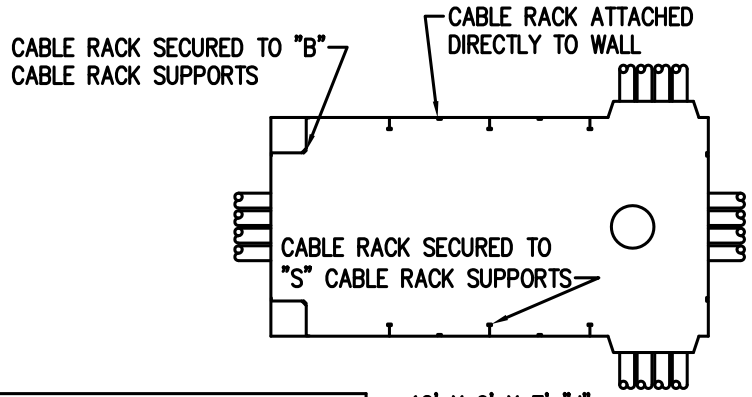

HARDWARE PACKAGE – ASS'Y NO. 20-600

ITEM	PART NO	REQ'D	DESCRIPTION
3	4487	8	"B" CABLE RACK SUPPORT
4	4476	14	47 HOLE CABLE RACK
6	8937	8	3/8-16 X 1 PLASTIC BOLT
7	8931	8	BONDING RIBBON CLAMP
9	4462	1	HOOK LADDER
11	23-001	4	PULL-IN IRON
13	1005	32	1/2-13 X 1 1/4 HEX BOLT
14	1020	32	1/2-13 HEX NUT

ITEM	PART NO	REQ'D	DESCRIPTION
15	4484	24	"S" CABLE RACK SUPPORT
17	1015	64	1/2-13 X 2 HEX BOLT

ITEM	PART NO	REQ'D	DESCRIPTION
1	8934	96	4 DIA. DUCT TERMINATOR

CAST-IN ITEMS

ITEM	PART NO	REQ'D	DESCRIPTION
2	4365	64	1/2-13 PLASTIC INSERT
5	5370	8	3/8-16 PLASTIC INSERT
8	4370	8	3 FT. BONDING RIBBON
10	—	18	4 1/4 DIA. KNOCKOUT
12	—	—	PULL-IN IRON KNOCKOUT
16	25-000	1	14 DIA. SUMP

Date: June 15, 2013

Dwg. No.: 27 00 00-10

UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN FACILITIES STANDARDS