


NOTE: FONTS AND BRAILLE AS SHOWN ARE FOR GRAPHIC REPRESENTATION ONLY. FABRICATED TYPEFACE SHALL BE OPTIMA SEMI-BOLD WITH GRADE 2 BRAILLE.

EACH STAIRWAY IDENTIFICATION SIGN SHALL BE REQUIRED TO HAVE A PHOTOLUMINESCENT BACKGROUND THAT COMPLIES WITH ASTM STANDARDS E 2072-74, "STANDARD SPECIFICATION FOR PHOTOLUMINESCENT (PHOSPHORESCENT) SAFETY MARKINGS."

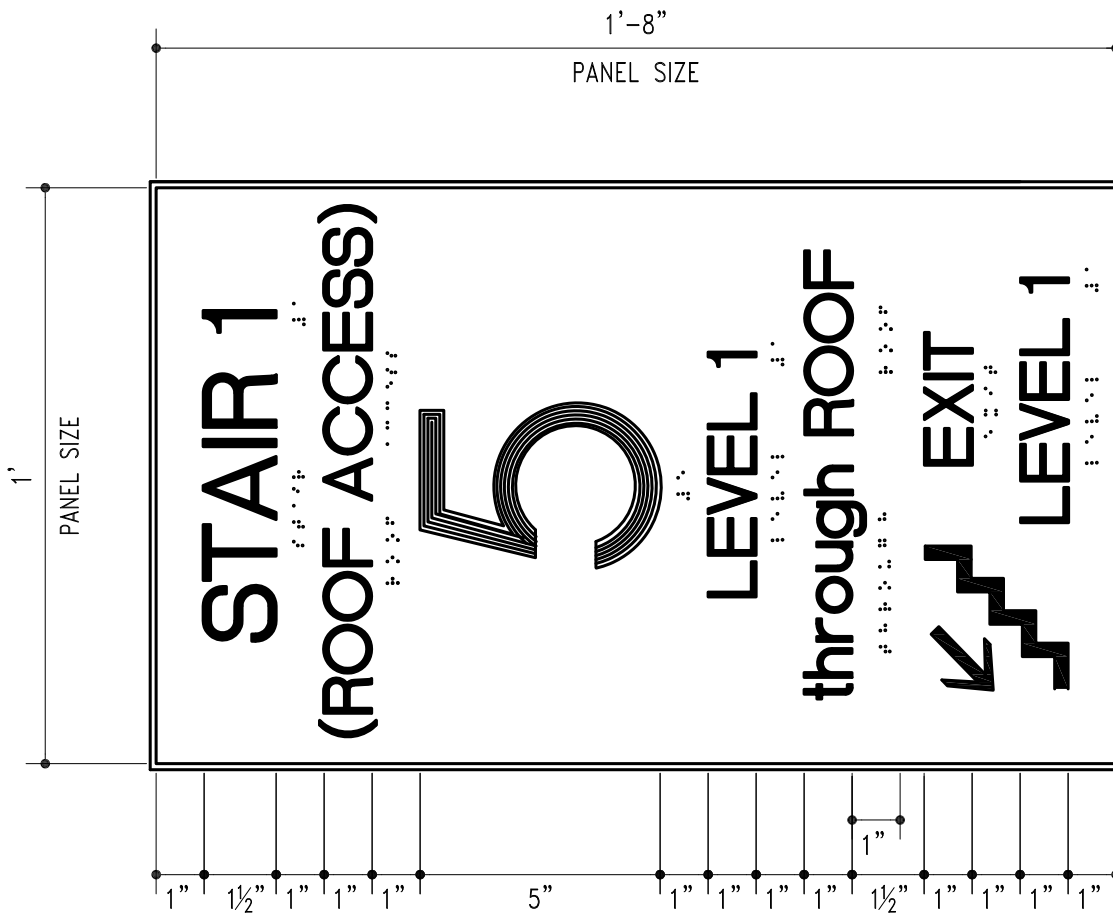

INTERIOR IDENTIFICATION SYSTEM
 TYPE 6b: STAIRWELL FLOOR LEVEL IDENTIFIER

Date: June 15, 2013

Dwg. No.: 10 14 03-14