


**EXAMPLE
ONLY**

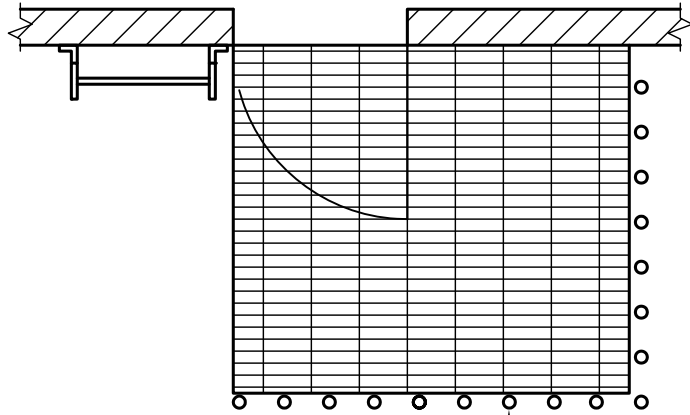

LEGAL GUARD / HAND RAIL
REQUIRED 42" MAX.

PLAN VIEW


NTS

MACHINERY SPACE ACCESS DOOR:
DOOR IS REQUIRED TO OPEN OUT, BE SELF CLOSING AND LOCKING WITH A "STOREROOM FUNCTION LOCKSET" WITH ACCOMMODATIONS FOR, OR BE KEYED WITH, A "RUSSWIN 6D1R" KEY CYLINDER.
DOOR MUST BE A MINIMUM 30" x 30" WIDE AND HEIGHT.
REFERENCE ASME A17.1, RULE 101.3d1a.

GENERAL NOTE:

LOCATION OF ALL ITEMS MUST BE COORDINATED WITH ELEVATOR CONTRACTOR BEFORE INSTALLING.

**EXAMPLE
ONLY**

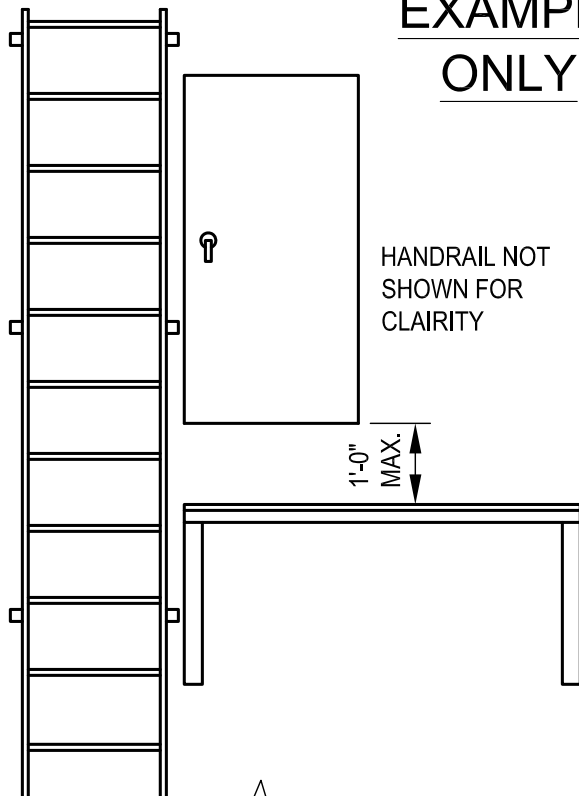

HANDRAIL NOT SHOWN FOR CLAIRITY

1'-0"
MAX.

FRONT VIEW

NTS

**EXAMPLE
ONLY**

DOOR IN OPEN POSITION

HANDRAIL NOT SHOWN FOR CLAIRITY

500 LBS MINIMUM

AS PER APPLICABLE CODE REQUIREMENTS

SIDE VIEW

NTS

**OVERHEAD MACHINERY SPACE ACCESS
FOR APPROVED VARIANCE ONLY**

Date: June 15, 2013

Dwg. No.: 14 20 00-4